

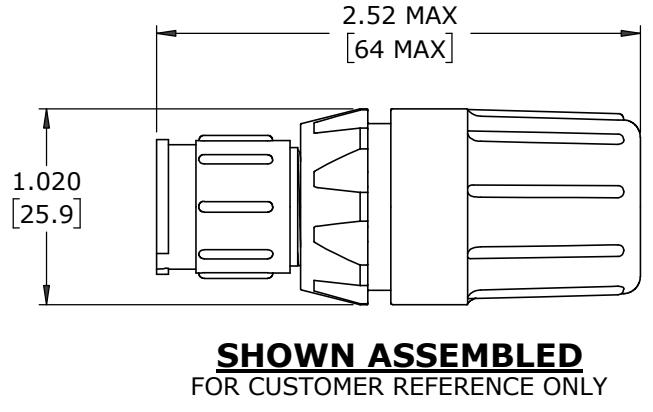
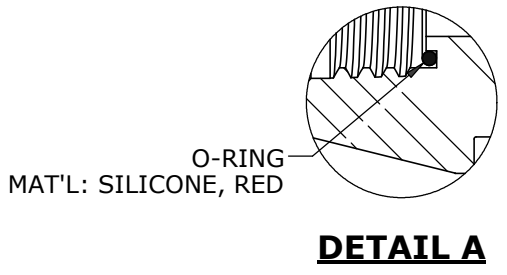





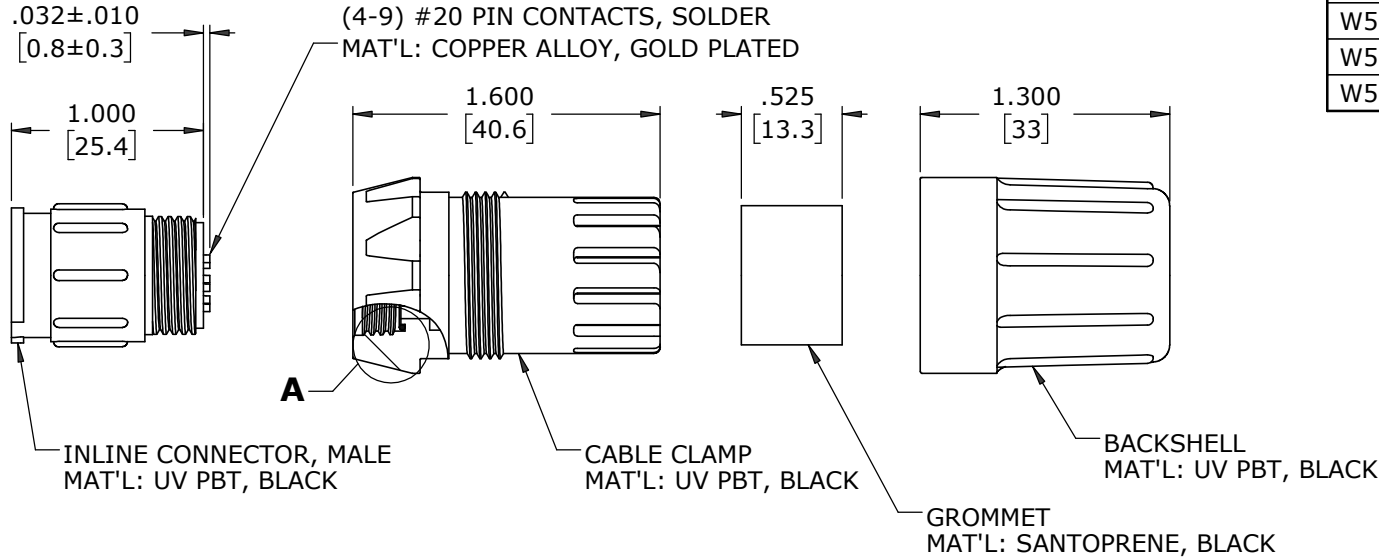







- NOTES:
1. ALL PARTS TO BE BULK PACKED.
 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 3. CONTACTS ASSEMBLED INTO CONNECTOR
 4. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE



ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
W5282-4PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	4 #20
W5282-5PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	5 #20
W5282-6PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	6 #20
W5282-6PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W5282-6PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	7 #20
W5282-7PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
W5282-7PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W5282-7PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	8 #20
W5282-8PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
W5282-8PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W5282-8PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	9 #20
W5282-9PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
W5282-9PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W5282-9PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	



CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

A	MA	05-23-24	RELEASED PER PDR 22008-5			
	PNK	06-02-23	PRR# P-22008-5			
REV.	INIT.	DATE	DESCRIPTION			
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: PNK	DATE: 06-02-23	 601 E. WILDWOOD VILLA PARK, IL 60181	
			CHECKED BY:			
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:		TITLE: INLINE CONNECTOR ASS'Y (4-9) #20 PIN CONTACTS, SOLDER INSTA-CLICK™ MULTI-CON-X STANDARD PRODUCT	
			SCALE NTS	SIZE B		SHEET 1 OF 1
▽ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			FILE: W5282-XPG-P-4XX	DIRECTORY: SLW		PART NUMBER: W5282-XPG-P-4XX
			REV A			