


NOTES:  
1. ALL PARTS TO BE BULK PACKED.  
2. REFER TO DRAWING HPMISTD FOR CONTACT PATTERNS.  
3. DIMENSIONS ARE REFERENCE ONLY, IN INCHES [mm].

CABLE-TO-CABLE CONNECTOR PART NUMBERS:

W 8 8 8 2 - X P G - P - XXX

CONTACTS STYLE: 2 = SOLDER      # OF CONTACTS: 8-10 #22 PINS      GROMMET SIZE = CABLE O.D. RANGE:  
**513** = 0.13 - 0.15 [3.3 - 3.8]  
**516** = 0.16 - 0.18 [4.1 - 4.6]  
**519** = 0.19 - 0.21 [4.8 - 5.3]  
**522** = 0.22 - 0.25 [5.6 - 6.3]  
**526** = 0.25 - 0.27 [6.3 - 6.8]  
**528** = 0.26 - 0.28 [6.6 - 7.2]

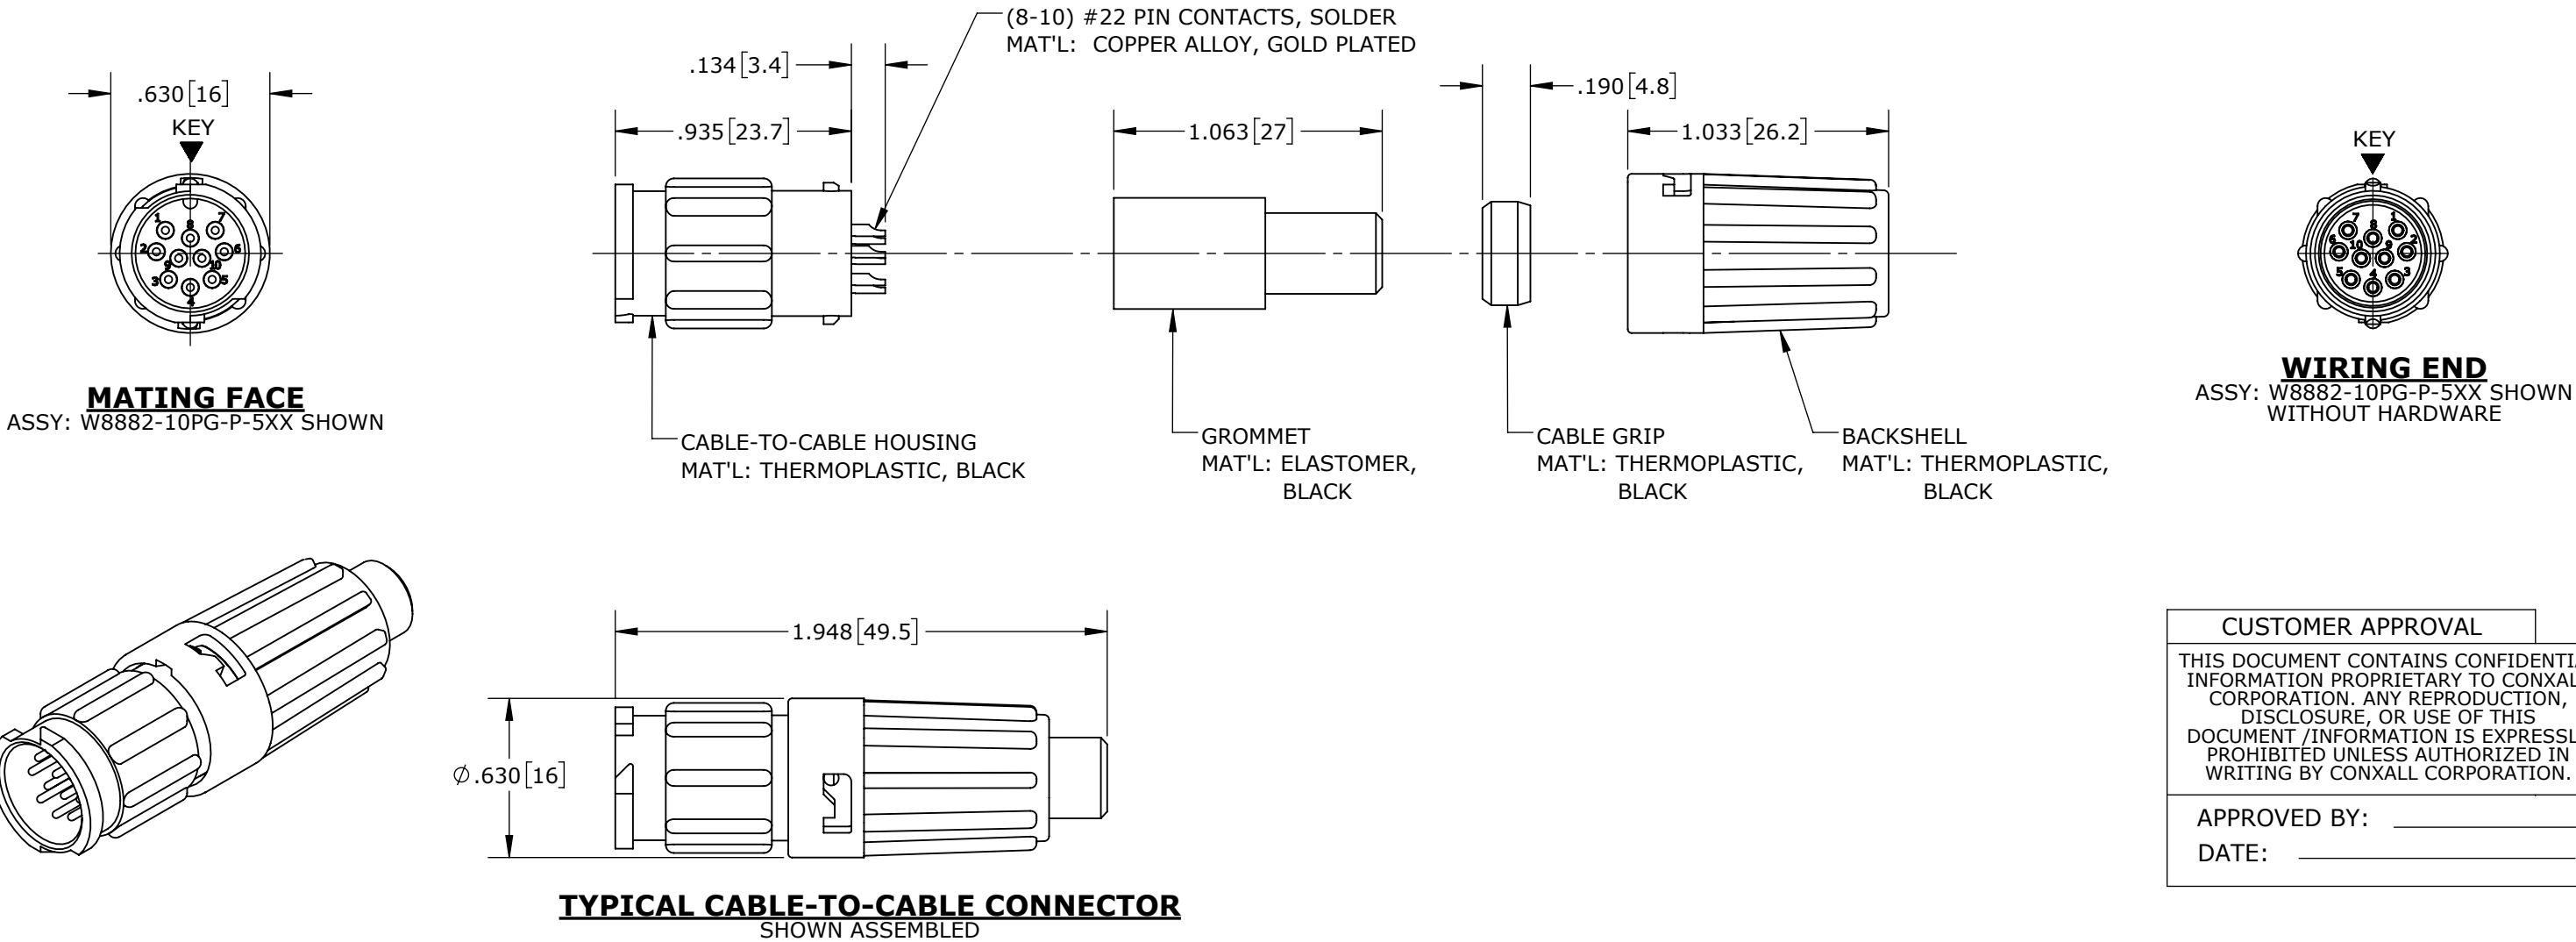


CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

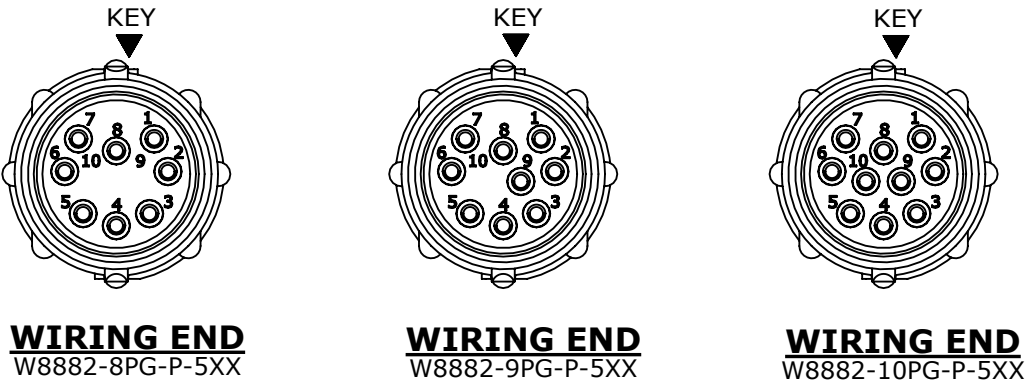

RoHS COMPLIANT

0A	PNK	03-20-18	PDR 16014
REV.	INIT.	DATE	DESCRIPTION
	PNK	03-20-18	ORIG. DRAWN BY: DATE: 03-20-18
			CHECKED BY:
			APPROVED BY:
			TITLE: CABLE-TO-CABLE ASSEMBLY 8-10 #22 PIN CONTACTS, SOLDER INSTA-CLICK™ MINI-CON-X
			CUSTOMER: STANDARD PRODUCT
			PART NUMBER: W8882-XPG-P-5XX
			REV 0A

ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.

ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.

UNLESS OTHERWISE SPECIFIED TOLERANCES: 3 PLACE DECIMALS ±.010 ANGLES ±1° FRACTIONS ±1/16

CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX

CONXALL

601 E. WILDWOOD VILLA PARK, IL 60181

SCALE: NTS

SIZE: B

SHEET: 1 OF 1

FILE: W8882-XPG-P-5XX

DIRECTORY: SLW