


## EN3™ MINI WEATHERTIGHT CONNECTOR SERIES

### SWITCHCRAFT® PANEL CONNECTOR ASSEMBLY INSTRUCTIONS

**Panel Connector** The panel mount connector comes in two pieces: the panel connector and the hex nut. The hex nut screws onto the panel mount connector using 8 to 10 inch-lbs. of torque maximum. See figure below.

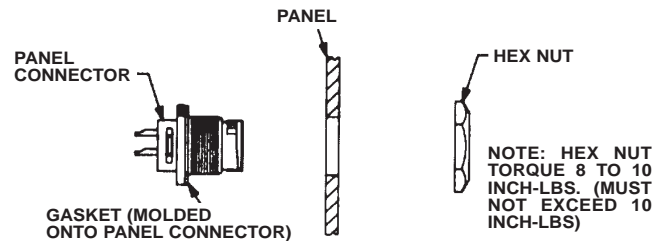

#### MATING INSTRUCTIONS FOR A CORD CONNECTOR TO A PANEL MOUNT OR IN-LINE CONNECTOR

First, align the notched keyway on both the panel mount or in-line and cord connector. Then, push the cord connector onto the mating connector. Grasp the coupling ring between the slots, push it toward the panel mount connector and rotate it clockwise nearly one half a

turn. Continue rotating until you feel the coupling ring ride over the locking "bump". This is the locked position. The cord connector is not securely in place unless this procedure is followed.

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{Inch}}{(\text{mm})}$

**NOTE:** Contact your Switchcraft Representative for price and delivery.