



CUSTOMER PRINT

PART NUMBER: 5282-XPG-5XX


NOTES:  
 1. ALL PARTS TO BE BULK PACKED  
 2. CONTACTS TO BE INSERTED INTO CONNECTOR.  
 4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

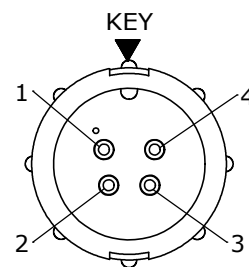


**FACE VIEW**  
5282-4PG-5XX

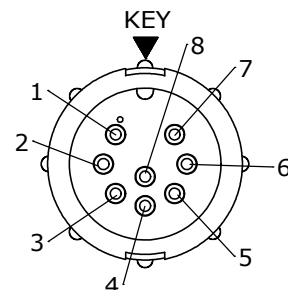


**FACE VIEW**  
5282-8PG-5XX

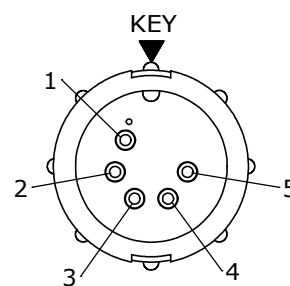


**FACE VIEW**  
5282-5PG-5XX

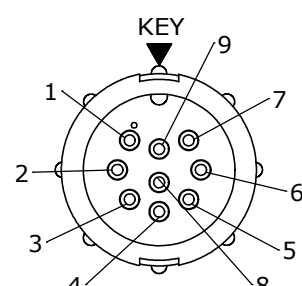


**FACE VIEW**  
5282-9PG-5XX

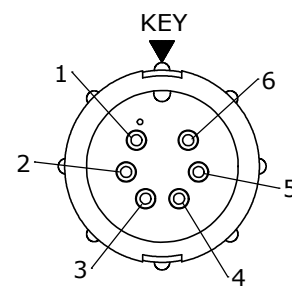

**FACE VIEW**  
5282-6PG-5XX

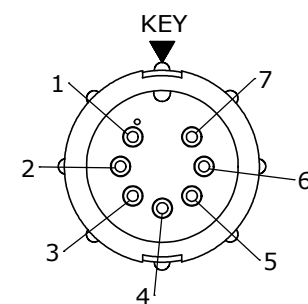

**FACE VIEW**  
5282-7PG-5XX

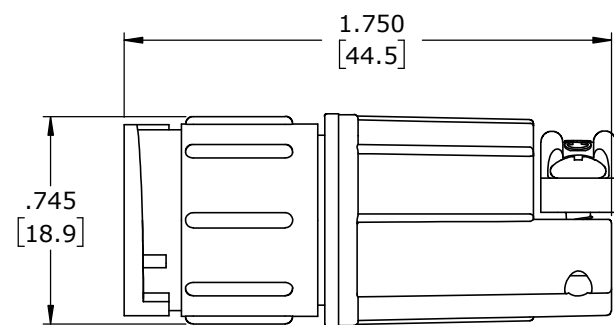

**SHOWN ASSEMBLED**  
FOR CUSTOMER REFERENCE ONLY


ASS'Y P/N	# OF CONTACTS
5282-4PG-5XX	4
5282-5PG-5XX	5
5282-6PG-5XX	6
5282-7PG-5XX	7
5282-8PG-5XX	8
5282-9PG-5XX	9

ASS'Y P/N	GROMMET SIZE	"X" DIM.
5282-XPG-5DC	DAISY CHAIN	Ø0.77 [19.6mm]
5282-XPG-515	CABLE O.D. .15-.17 [3.8-4.3]	Ø0.77 [19.6mm]
5282-XPG-518	CABLE O.D. .18-.20 [4.6-5.1]	Ø0.77 [19.6mm]
5282-XPG-521	CABLE O.D. .21-.23 [5.3-5.8]	Ø0.77 [19.6mm]
5282-XPG-524	CABLE O.D. .24-.27 [6.1-6.8]	Ø0.77 [19.6mm]
5282-XPG-528	CABLE O.D. .28-.29 [7.1-7.4]	Ø0.77 [19.6mm]
5282-XPG-530	CABLE O.D. .30-.32 [7.6-8.1]	Ø0.77 [19.6mm]
5282-XPG-535	CABLE O.D. .35-.40 [8.9-10.2]	Ø0.83 [21.1mm]

GROMMET SIZE FOR SINGLE GROMMET OR "DC" FOR DAISY CHAIN

NUMBER OF CONTACTS

GROMMET, DAISY CHAIN FOR 5282-XPG-5DC  
MAT'L: RUBBER, BLACK

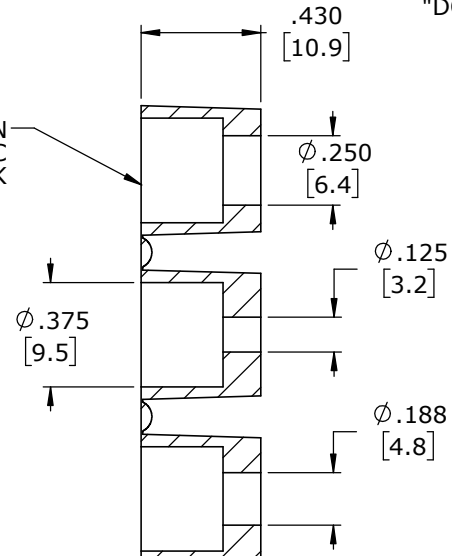

(2) #4x3/8 PHILLIPS PAN HEAD SCREW  
MAT'L: STAINLESS STEEL

CABLE STRAP  
MAT'L: SUPER TOUGH NYLON BLACK

INLINE CONNECTOR, MALE  
MAT'L: NYLON, BLACK  
NO. OF POSITION SEE CHART

(4-9) #20 PIN CONTACTS  
MAT'L: GOLD PLATED COPPER ALLOY

Ø "X" DIM.

SLEEVE  
MAT'L: NYLON, BLACK

SINGLE GROMMET  
MAT'L: SANTOPRENE, BLACK  
SEE CHART FOR CABLE SIZE

BACKSHELL  
MAT'L: NYLON, BLACK

**CUSTOMER APPROVAL**

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_

B	AN	02-25-21	ADDED 5282-XPG-535 ROW AND "X" DIM. COLUMN TO CHART, UPDATED STRAP STYLE. PER ECR 9543
A	MA	01-31-20	DRAWING CREATED PER DOR 20-E149SL-4
REV.	INIT.	DATE	DESCRIPTION
<small>ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF CONXALL CORPORATION. UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.</small>			ORIG. DRAWN BY: MA DATE: 01-31-20 CHECKED BY: _____
<small>ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.</small>			APPROVED BY: _____ TITLE: INLINE CABLE ASSEMBLY (4-9) #20 PIN CONTACTS MULTI-CON-X STANDARD PRODUCT CUSTOMER: _____
SCALE	SIZE	SHEET	
NTS	B	1 OF 1	
FILE:	DIRECTORY:	PART NUMBER:	REV
5282-XPG-5XX	SLW	5282-XPG-5XX	B

DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS

**RoHS COMPLIANT**