

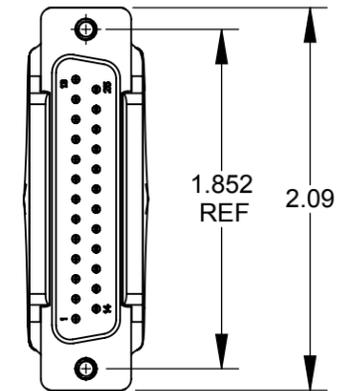


AES/EBU DB25 8 CHANNEL BIDIRECTIONAL IN AND OUT						
(CABLE)	DB25			DB25		
	(RED)	(BLACK)	(BARE)	(RED)	(BLACK)	(BARE)
BROWN	24	12	25	18	6	19
RED	10	23	11	4	17	5
ORANGE	21	9	22	15	3	16
YELLOW	7	20	8	1	14	2
GREEN	18	6	19	24	12	25
BLUE	4	17	5	10	23	11
PURPLE	15	3	16	21	9	22
GRAY	1	14	2	7	20	8

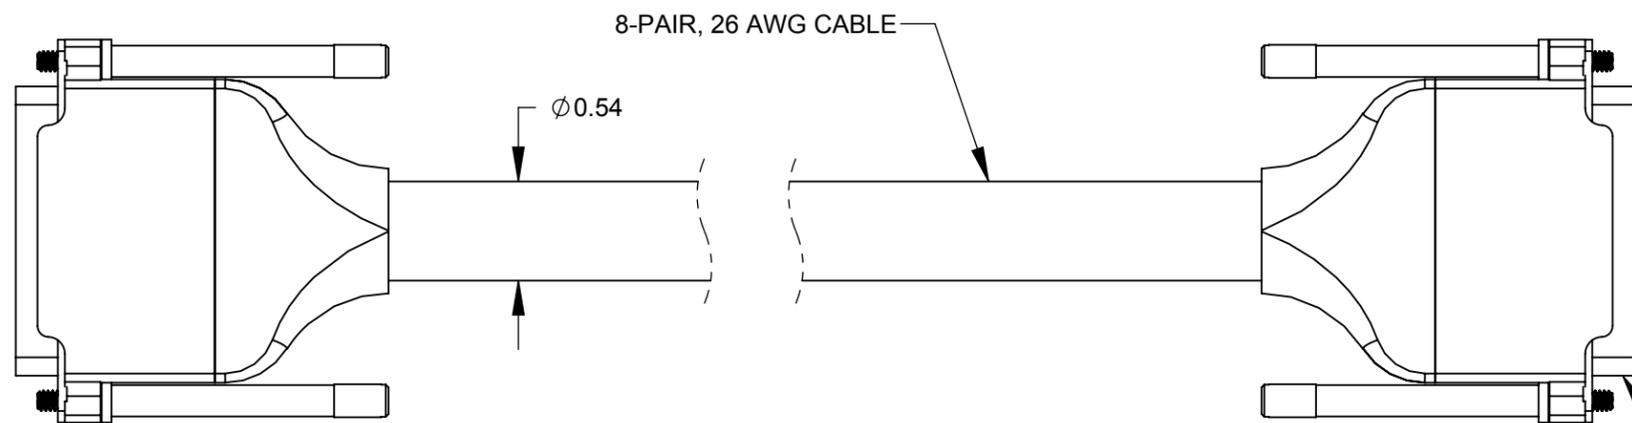

25 PIN MALE DSUB ASSEMBLY
METAL SHELL, JACKSCREWS
BOTH ENDS
(SEE NOTE 3)

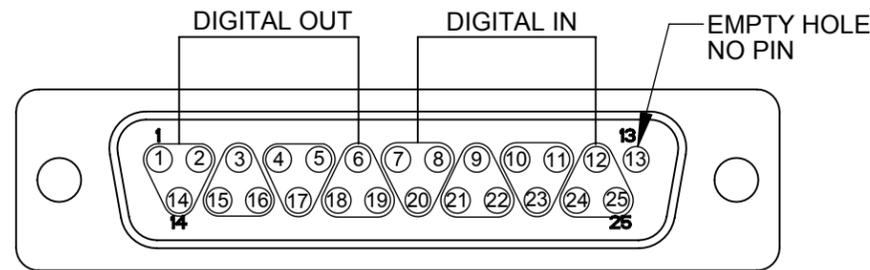

DB25 PIN-OUT VIEW
TYP BOTH ENDS

PART NO	CABLE LENGTH "X"
DB25M02DB25MAES	2.00 FT +/- 1.50 IN
DB25M03DB25MAES	3.00 FT +/- 1.50 IN
DB25M10DB25MAES	10.00 FT +/- 1.50 IN

CUSTOMER DRAWING

NOTES:

- 110 OHM CABLE MEETS AES/EBU DIGITAL AUDIO STANDARDS.
- THE BREAKOUT CABLE COMES COILED AND PACKAGED IN A BAG.
- JACKSCREWS ARE SHIPPED UNASSEMBLED. CABLE COMES WITH BOTH #4-40 THREAD (4) AND #M3 THREAD (4) JACKSCREWS.
- MATERIALS:
DSUB - COPPER ALLOY, NICKEL PLATED WITH GOLD PINS
CABLE - COPPER, THERMOPLASTIC
JACKSCREWS - STAINLESS STEEL
- THIS PRODUCT IS RoHS COMPLIANT.

REV	ECO NUMBER	DATE	BY	APVD
C	26795	7-8-11	TO	TJK
B	26637	10/4/10	RS	TJK
A	25716	10/03/07	JGK	TJK

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES

- TWO PLACE DECIMALS ±0.02

- THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
SIZE	WIDTH	MULT	LBS/M	TEMPER					
FINISH					MATERIAL				
SPEC No.					SPEC No.				
FIRST USED ON					SCALE				
					1:1				
DATE DRAWN	BY	CHKD	APVD						
7/17/07	JGK	RS	TJK						
			11/22/10						
NAME					PART No.				
DB25M TO DB25M AES, RoHS					DB25M__DB25MAES				
									REV
									C



SHEET 1 OF 1