
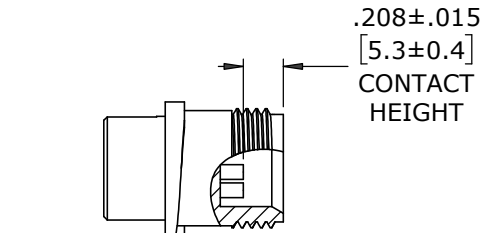







NOTES:

1. ALL PARTS TO BE BULK PACKED.
2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
3. CONTACTS SHIPPED UNASSEMBLED
4. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE



(4-9) #20 PIN CONTACTS, CRIMP
MAT'L: COPPER ALLOY, GOLD PLATED

.049
[1.3]

.935
[23.7]

.470
[11.9]

1.600
[40.6]

.525
[13.3]

1.300
[33]

O-RING
MAT'L: NEOPRENE, BLACK


CABLE CONNECTOR, MALE
MAT'L: NYLON, BLACK

WINGED COUPLING RING
MAT'L: NYLON, BLACK


CABLE CLAMP
MAT'L: UV PBT, BLACK

GROMMET
MAT'L: SANTOPRENE, BLACK







BACKSHELL
MAT'L: UV PBT, BLACK

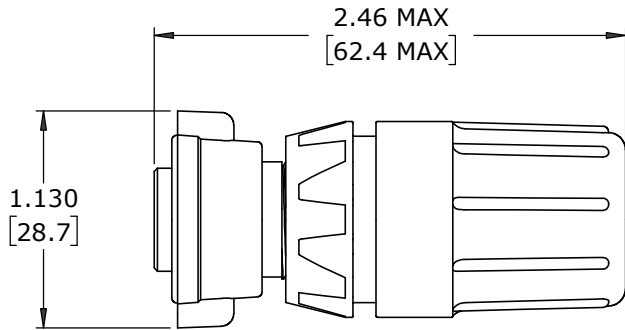

SHOWN ASSEMBLED
FOR CUSTOMER REFERENCE ONLY

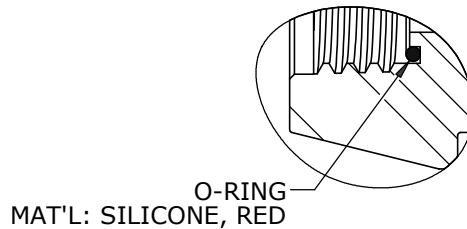

DETAIL "A"



DIMENSIONS IN BRACKETS [] ARE METRIC

ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
3280-4PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	4 #20
3280-5PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	5 #20
3280-6PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	6 #20
3280-6PG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3280-6PG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
3280-7PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	7 #20
3280-7PG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3280-7PG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
3280-8PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	8 #20
3280-8PG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3280-8PG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
3280-9PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	9 #20
3280-9PG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3280-9PG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____
DATE: _____

RoHS COMPLIANT

A	MA	03-21-24	RELEASED PER PDR 22008-3			
	PNK	06-02-23	PRR# P-22008-2			
REV.	INIT.	DATE	DESCRIPTION			
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: PNK		 601 E. WILDWOOD VILLA PARK, IL 60181	
			DATE: 06-02-23			
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			CHECKED BY:			
			APPROVED BY:			
▷ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXXX			SCALE NTS	SIZE B		
			FILE: 3280-XPG-4XXW		DIRECTORY: SLW	
			PART NUMBER: 3280-XPG-4XXW		REV A	