

CUSTOMER PRINT

PART NUMBER: CARA6280XPPXXX90



- NOTES:
1. FINISHED PRODUCT TO BE COILED
 2. OVERMOLD BOOT MATERIAL: UV PBT, BLACK
 3. ELECTRICAL TEST: 100% CONTINUITY
 4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

ASS'Y P/N	NO. OF CONTACTS
CARA62802PPXXX90	2
CARA62803PPXXX90	3
CARA62804PPXXX90	4
CARA62805PPXXX90	5
CARA62806PPXXX90	6
CARA6280XPPXXX90	

CABLE LENGTH IN "INCHES"
NO. OF CONTACTS

ASS'Y P/N	"X" DIM
CARA6280XPP03990	3 FT. 3 1/2 IN. ±2 IN. [1M ±50.8mm]
CARA6280XPP07990	6 FT. 7 IN. ±2 IN. [2M ±50.8mm]
CARA6280XPP19790	16 FT. 5 IN. ±4 IN. [5M ±101.6mm]
CARA6280XPP39490	32 FT. 9 3/4 IN. ±8 IN. [10M ±203.2mm]
CARA6280XPPXXX90	

CABLE LENGTH IN "INCHES"
NO. OF CONTACTS

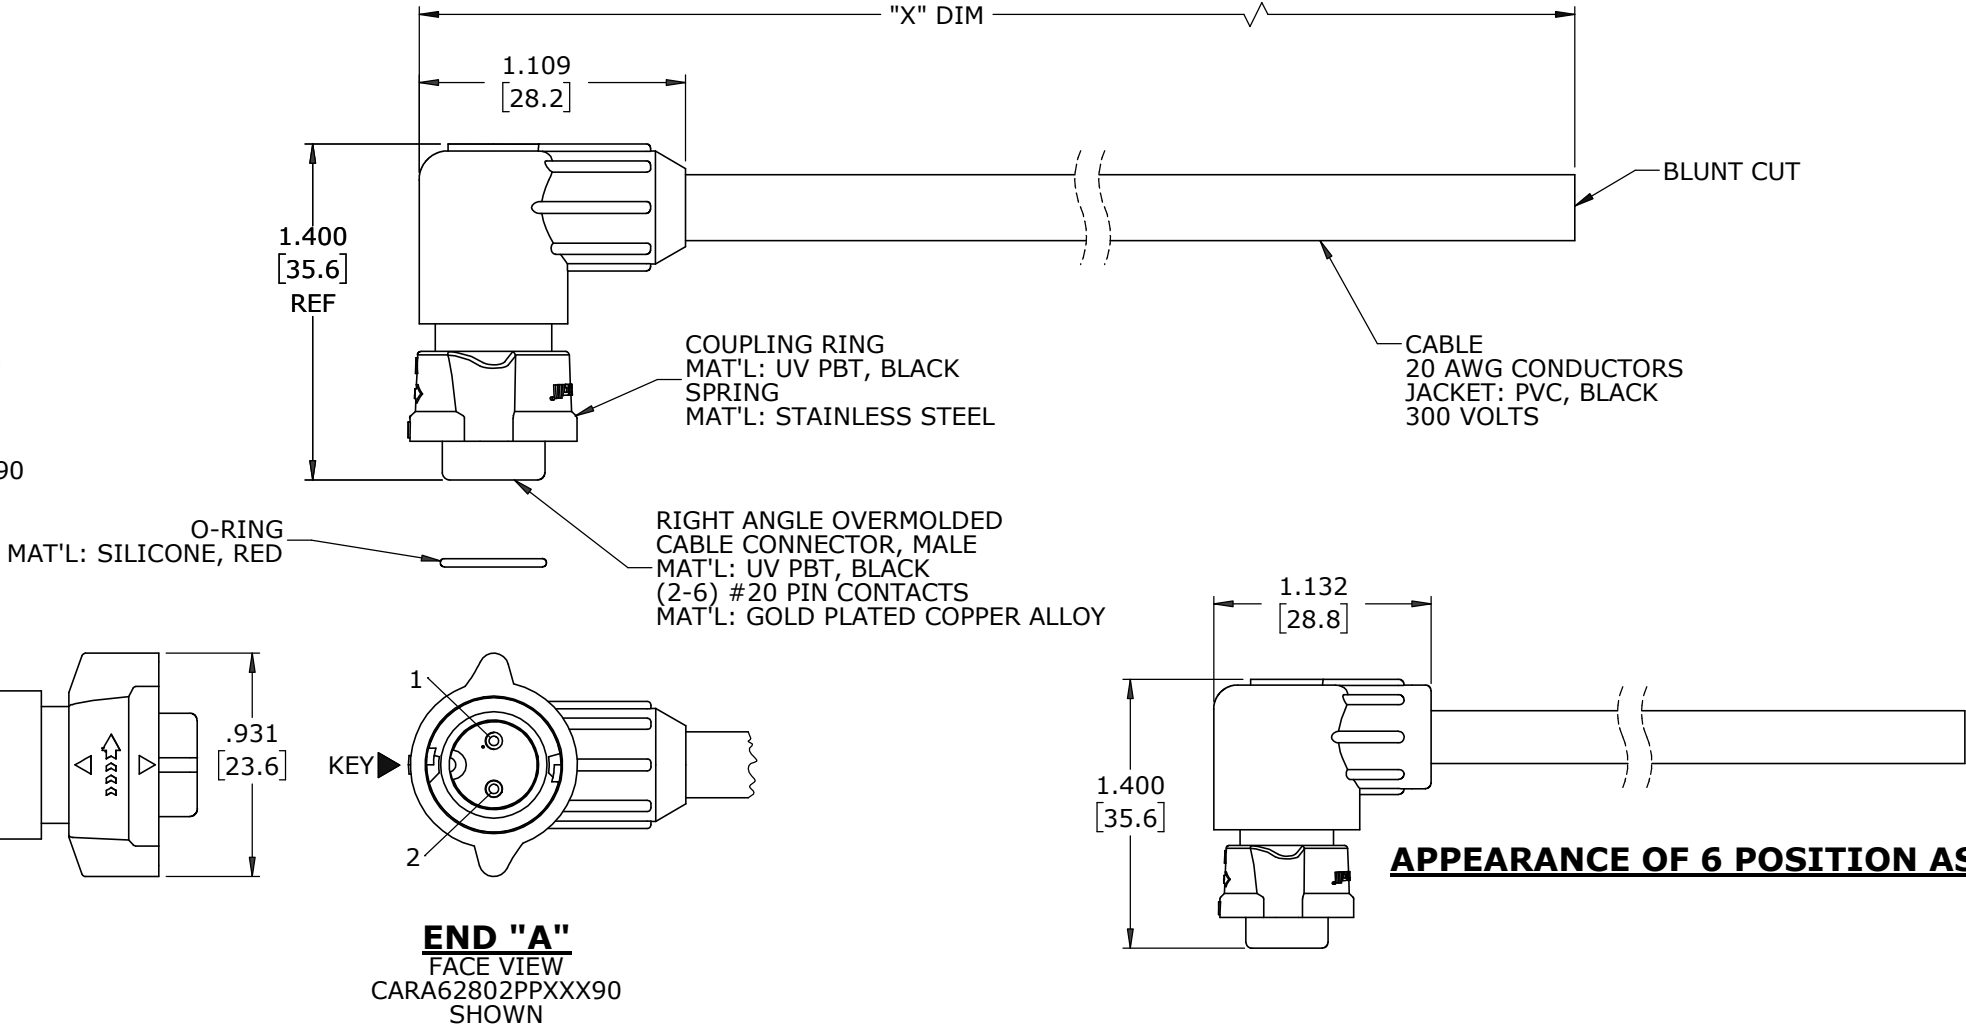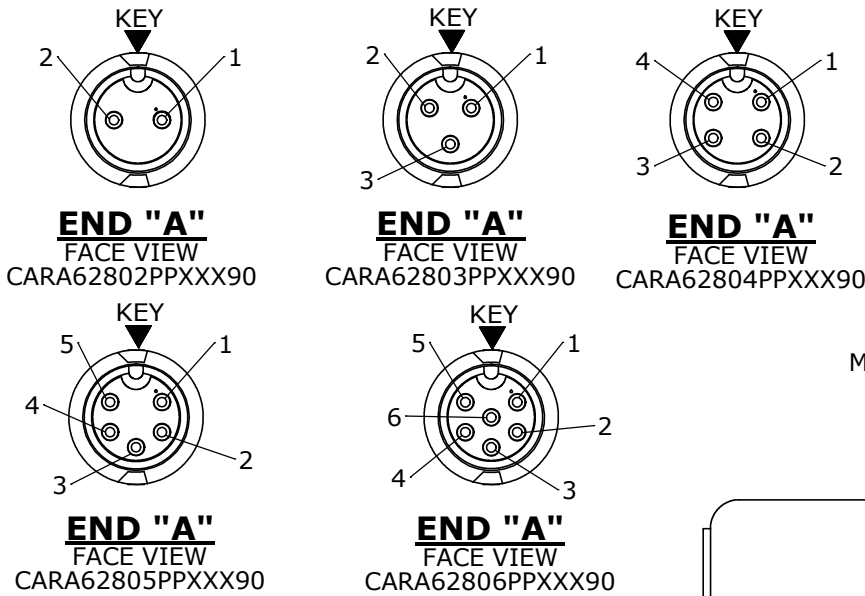

APPEARANCE OF 6 POSITION ASSEMBLY

ASSY P/N	CABLE	COLOR CODE END "A"					
CARA62802PPXXX90	2/20 AWG O.D. .215 REF	COLOR CODE					
		POS. 1	POS. 2				
		BLK	WHT				
CARA62803PPXXX90	3/20 AWG O.D. .220 REF	WIRE COLOR CODE					
		POS. 1	POS. 2	POS. 3			
		BLK	WHT	GRN			
CARA62804PPXXX90	4/20 AWG O.D. .235 REF	WIRE COLOR CODE					
		POS. 1	POS. 2	POS. 3	POS. 4		
		BLK	WHT	GRN	RED		
CARA62805PPXXX90	5/20 SWG O.D. .255 REF	WIRE COLOR CODE					
		POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	
		BLK	WHT	GRN	RED	BLU	
CARA62806PPXXX90	6/20 AWG O.D. .275 REF	WIRE COLOR CODE					
		POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6
		BLK	WHT	GRN	RED	BLU	VIO

DIMENSIONS IN BRACKETS [] ARE
IN MILLIMETERS UNLESS INDICATED

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

RoHS COMPLIANT

A	MA	06-04-21	DRAWING CREATED PER DOR 21-109359DS						
REV.	INIT.	DATE	DESCRIPTION						
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: MA		DATE: 06-04-21		 601 E. WILDWOOD VILLA PARK, IL 60181		
			CHECKED BY:						
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:		TITLE: CABLE ASSEMBLY (2-6) #20 PIN CONTACTS INSTA-CLICK™ MINI-CON-X STANDARD PRODUCT				
			SCALE NTS		SIZE B	SHEET 1 OF 1	CUSTOMER: CARA6280XPPXXX90		
▷ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			FILE: CARA6280XPPXXX90		DIRECTORY: SLW		PART NUMBER: CARA6280XPPXXX90		REV A