

CUSTOMER PRINT

PART NUMBER: CARA6380XPPXXX90


- NOTES:
- 1. FINISHED PRODUCT TO BE COILED
 - 2. OVERMOLD BOOT MATERIAL: UV PBT, BLACK
 - 3. ELECTRICAL TEST: 100% CONTINUITY
 - 4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

ASS'Y P/N	NO. OF CONTACTS
CARA63802PPXXX90	2
CARA63803PPXXX90	3
CARA63804PPXXX90	4
CARA6380XPPXXX90	


CABLE LENGTH IN "INCHES"
NO. OF CONTACTS

ASS'Y P/N	"X" DIM
CARA6380XPP03990	3 FT. 3 1/2 IN. ±2 IN. [1M ±50.8mm]
CARA6380XPP07990	6 FT. 7 IN. ±2 IN. [2M ±50.8mm]
CARA6380XPP19790	16 FT. 5 IN. ±4 IN. [5M ±101.6mm]
CARA6380XPP39490	32 FT. 9 3/4 IN. ±8 IN. [10M ±203.2mm]
CARA6380XPPXXX90	


CABLE LENGTH IN "INCHES"
NO. OF CONTACTS



END "A"
FACE VIEW
CARA63802PPXXX90




END "A"
FACE VIEW
CARA63803PPXXX90




END "A"
FACE VIEW
CARA63804PPXXX90



COUPLING RING
MAT'L: UV PBT, BLACK
SPRING
MAT'L: STAINLESS STEEL



O-RING
MAT'L: SILICONE, RED

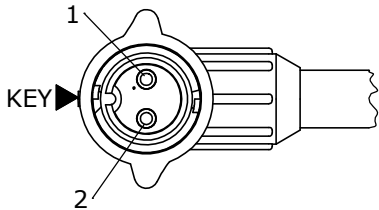

END "A"
FACE VIEW
CARA63802PPXXX90
SHOWN

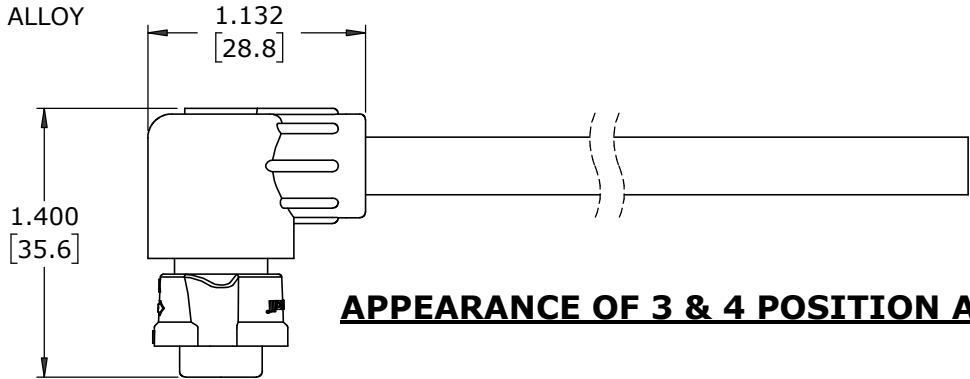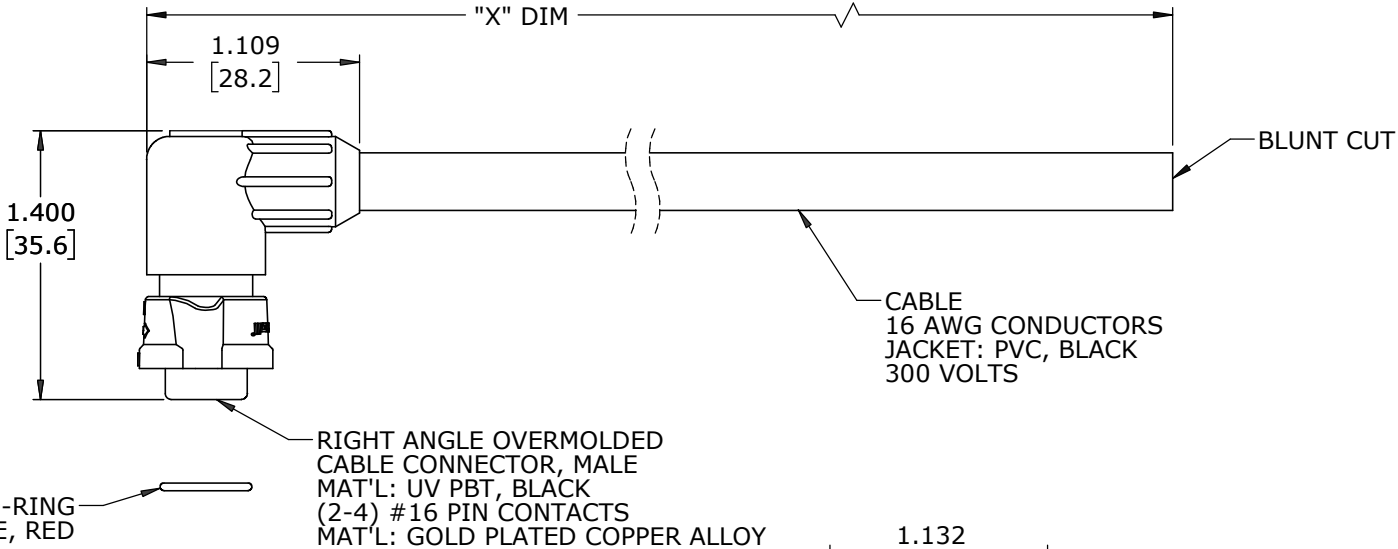

ASSY P/N	CABLE	COLOR CODE END "A"			
CARA63802PPXXX90	2/16 AWG O.D. 0.270 REF	COLOR CODE			
		POS. 1	POS. 2		
		BLK	WHT		
CARA63803PPXXX90	3/16 AWG O.D. 0.275 REF	WIRE COLOR CODE			
		POS. 1	POS. 2	POS. 3	
		BLK	WHT	GRN	
CARA63804PPXXX90	4/16 AWG O.D. 0.300 REF	WIRE COLOR CODE			
		POS. 1	POS. 2	POS. 3	POS. 4
		BLK	WHT	GRN	RED

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS UNLESS INDICATED


CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

RoHS COMPLIANT

A	MA	06-04-21	DRAWING CREATED PER DOR 21-109359DS		
REV.	INIT.	DATE	DESCRIPTION		
			ORIG. DRAWN BY: MA DATE: 06-04-21	 601 E. WILDWOOD VILLA PARK, IL 60181	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			CHECKED BY:		
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:	TITLE: CABLE ASSEMBLY (2-4) #16 PIN CONTACTS INSTA-CLICK™ MINI-CON-X STANDARD PRODUCT	
SCALE NTS		SIZE B	SHEET 1 OF 1	CUSTOMER: CARA6380XPPXXX90	
FILE: CARA6380XPPXXX90		DIRECTORY: SLW	PART NUMBER: CARA6380XPPXXX90	REV A	